




Unique • Elegant • Timeless



www.fabfloors.in

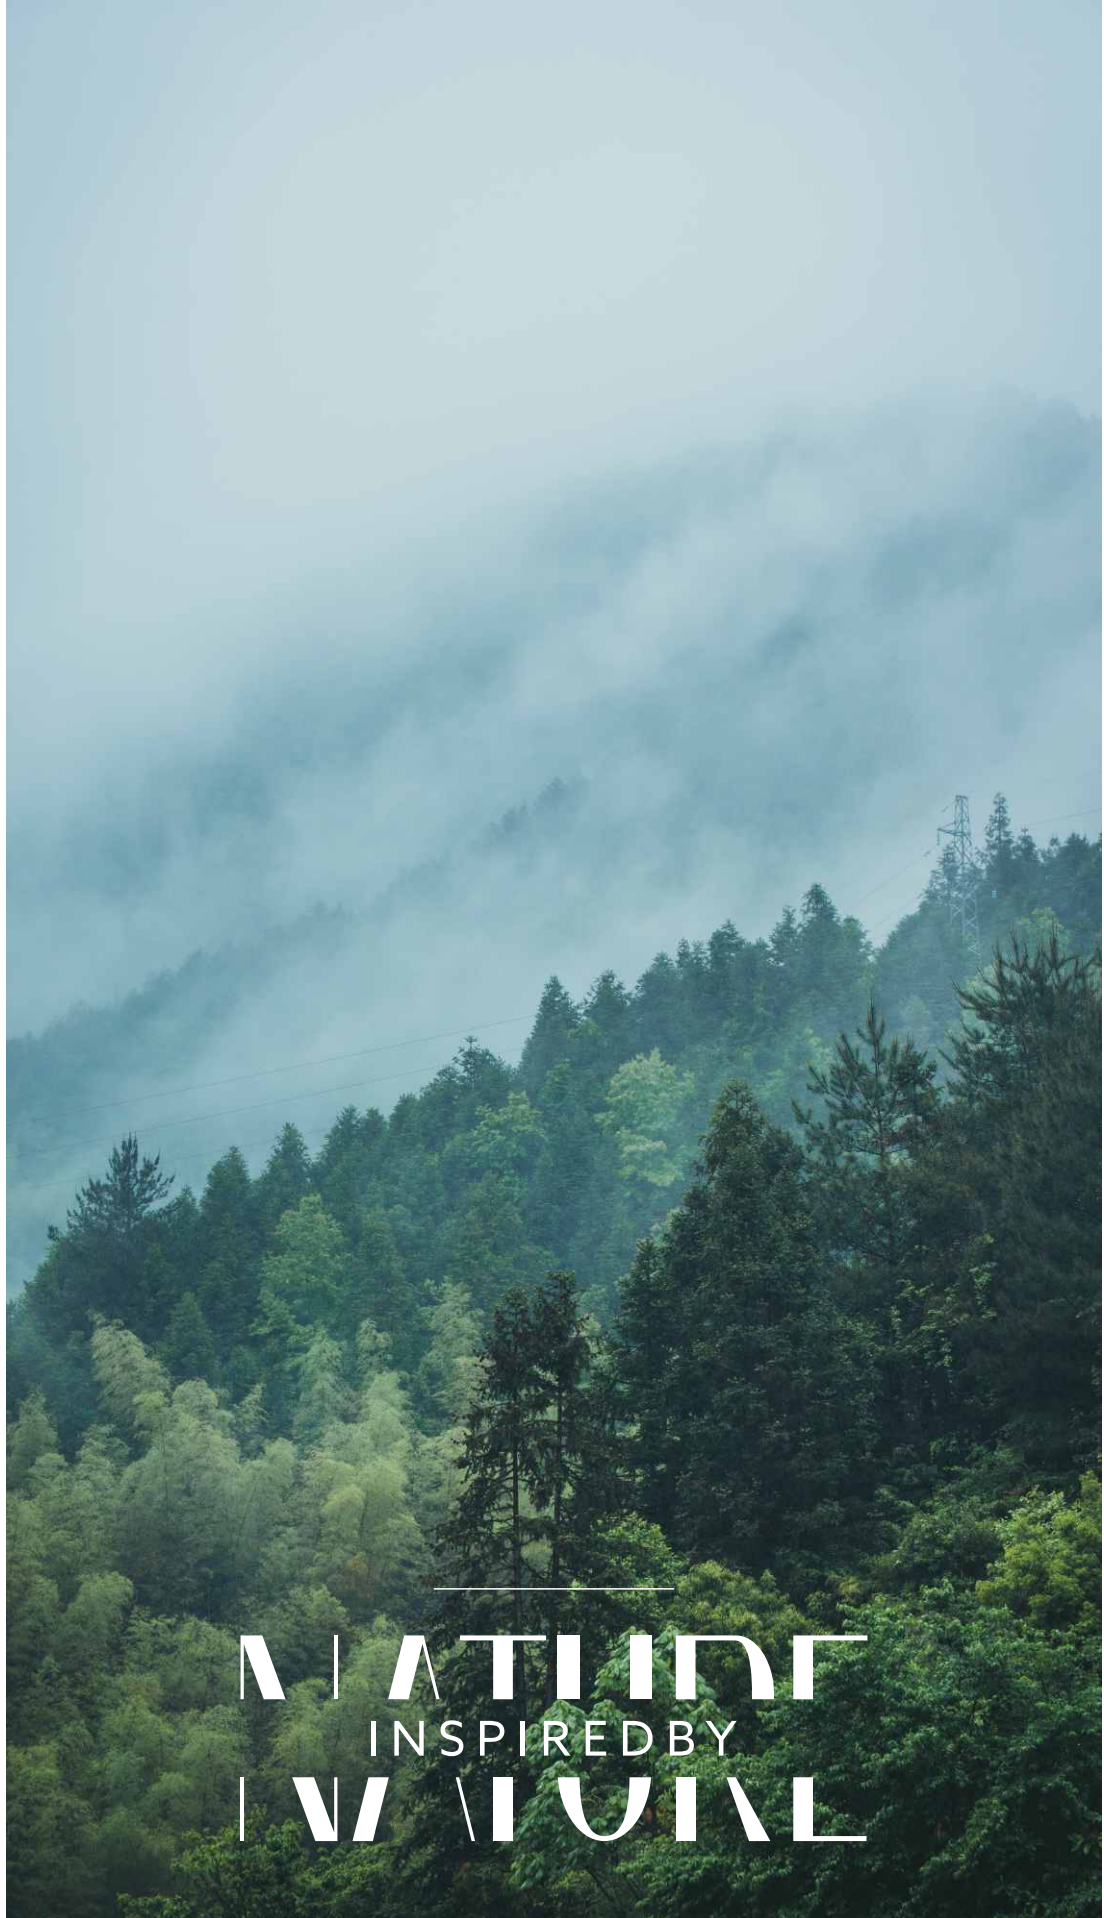

NATURE
INSPIREDBY
NATURE

There is always a smarter way
to do things better!



ABOUT US

We, Multiple Entities Business Family, have been into building material industry for over three decades. Specializing in retailing & manufacturing of Tile, Marble, Bathroom fittings, Natural stone, Granite, etc.

Our retail operations are in one of the world's oldest city Varanasi & Lucknow in the state Uttar Pradesh. And manufacturing plants in Jalore (Rajasthan) & Bangalore (Karnataka).

After successful journey with consistent growth now we have entered into the field of most innovative flooring product 'SPC', Stone Polymer Composite as manufacturer and exporter with the highly experienced team of experts who are committed to delivering the highest quality workmanship and customer service to ensure that every project is completed on time and within budget.

This SPC Flooring plant is located in the *Stone Hub of India*, in the state Rajasthan.


Our motto is ***"High Quality Low Budget"*** thus will be competitive in the international market.

Unique • Elegant • Timeless



ABOUT SPC FLOORING

- Made up of calcium carbonate / limestone powder and polyvinyl chloride (PVC), which are fused together under high pressure and temperature to create a durable, waterproof floor.
- Having several eco-friendly features, including the reuse of industrial waste, lower toxicity compared to traditional flooring, high durability and moisture resistance, waterproof nature, and recyclability, thus make it a sustainable choice.
- Resistant to environmental changes and does not expand or contract with changes in temperature or humidity.
- Due to exceptionally dense core, it is highly resistant to deformation such as denting and warping, thus make it highly durable to withstand heavy foot traffic.
- Resistant to scratches, dents, stains and scuffs.
- Useful for areas such as kitchens, bathrooms, and entryways.
- Dust free / Noise free / glue-less installation format with Click-Locking system (German Technology), makes it an economical and time-saving choice.
- Suitable for Light commercial and Residential use.
- Free from dangerous chemicals.
- Easy to replace / re-install the damaged plank/tile.
- Limitless design innovation is possible, so there are endless options of patterns, colours, & grains.
- Fire resistant.
- Can be installed on currently existed floor.
- No extensive sub-floor preparation is required, just ensure smooth, dry, clean, flat and solid surface.

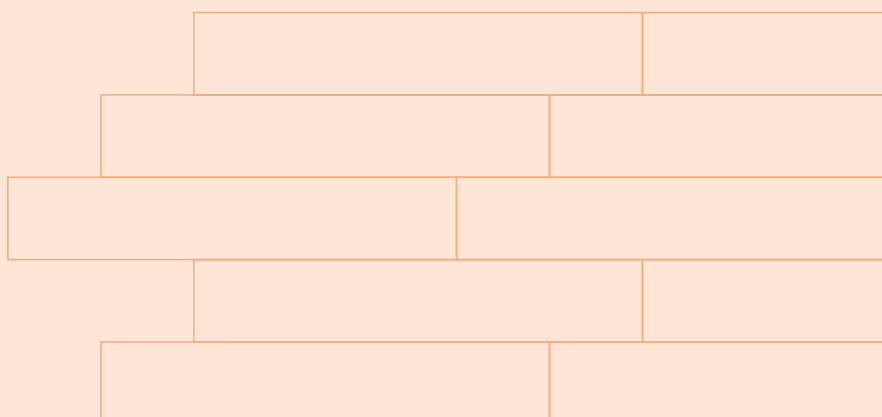



Our Vision

Fab Floors International aspires to stand over the flooring industry, offering an ultra exclusive collection of innovative surfaces that defy conventions.

Our vision is to disseminate the enchantment of our surfaces globally, and we aim to achieve this sooner rather than later.

**Constantly striving
for perfection.**

Fab Floors

**passion brings
innovative flooring,
designed for you!**




Our Mission

Fab Floors International is founded with a distinct goal to revolutionize modern flooring by creating innovative and visually stunning surfaces.

Our mission is to deliver exceptional quality flooring with contemporary designs, all while keeping prices affordable.

SPC FLOORING LAYER STURCTURE

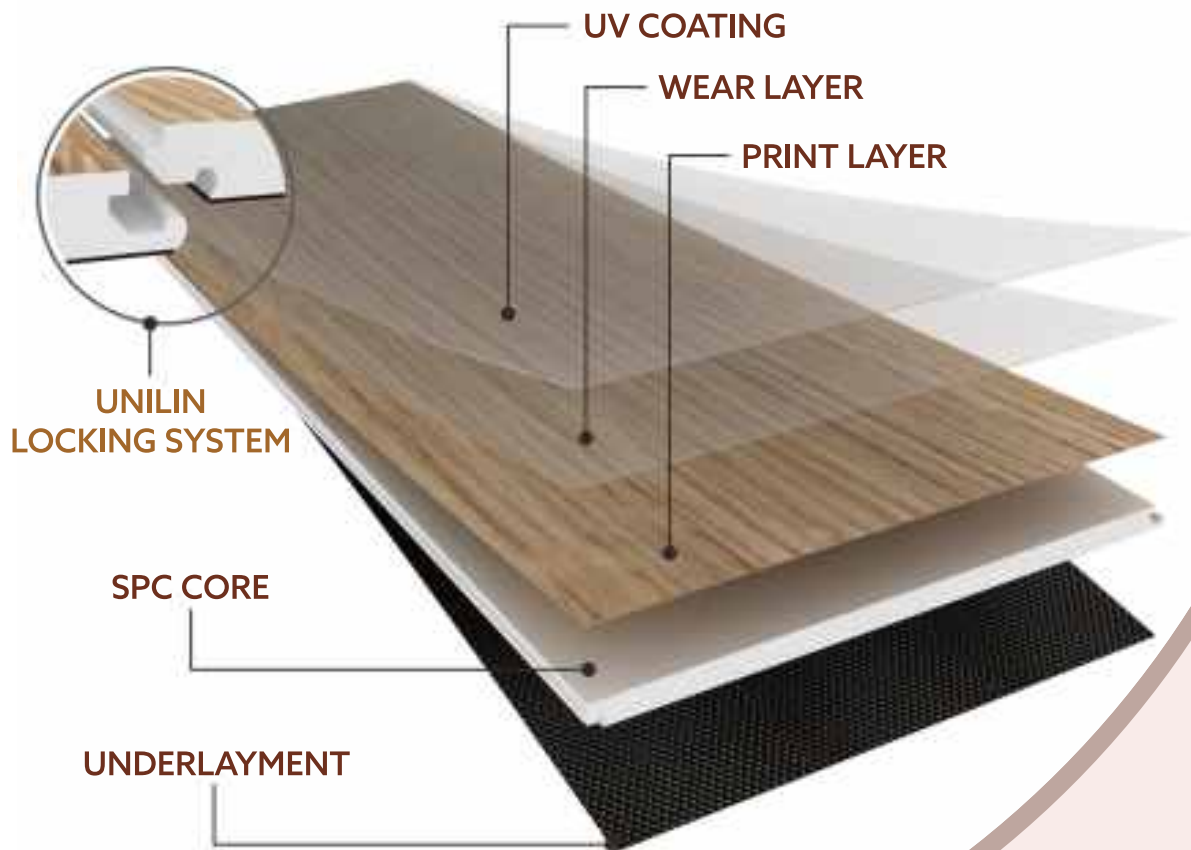

Fab Floors is **Rigid Core Luxury Vinyl** flooring also known as **Stone Plastic Composite (SPC)** flooring is considered to be an eco-friendly & strongest possible option for flooring.

UV COATING

Scratch Resistant, UV ray Resistance to prevent color fading

WEAR LAYER

Protects the surface from wear and tear, create surface textures of wood and stone.

PRINT LAYER

4K Graphic printed on the film provide look and color of wood, stone and carpet.

SPC CORE

Limestone powder and PVC Composite. Durable, Waterproof and Fire Retardant.

UNDERLAYMENT

EVA or IXPE padding cushions your feet and improves sound insulation.

ADVANTAGES

Apart from its robust and waterproof properties, SPC flooring offers a range of other advantages. One significant benefit is its easy installation process. Thanks to its click-lock design, SPC flooring can be installed over existing flooring, significantly reducing installation time.

 100% Waterproof	 Fire Retardant	 Eco Friendly	 Quick Installation
 No Formaldehyde	 Sound Insulation	 Skid Resistant	 Highly Durable
 No Expand or Contract	 Super Wear Resistant	 No Termites, No Decay	 Click n Lock Patent Technology
 Impact Resistant	 Easy to Clean	 Stain Resistant	 Scratch Resistant



Made In India



Can be installed
on existing floors



Flooring in less
than a day




10 Year Warranty

AREAS TO USE

SPC flooring is a great option for both residential and commercial settings.



Buildings



Corridor



Bedroom



Living Room



Dining Room



Office



Public Places



Airport



Restuarant



Super Market



Store

SPC Flooring has got you covered, whether you're remodelling an office space, your house, acing a hotel or maximizing a commercial area. It's designed to handle heavy foot traffic, dropped dishes in the kitchen, or kids and pets roughhousing without showing much wear and tear. SPC's 100% waterproof construction makes it ideal for kitchens, bathrooms, basements, or any area prone to spills and moisture. It is durable, easy to clean, and comes in many different styles.

SPC FLOORING

SURFACE PATTERNS



OCALA WALNUT

ELEGANCE OAK



BOSTON OAK

ROYAL BOURBON



TRUFFLE OAK

AMBERWOOD
CLASSIC



MIDNIGHT ASH

HONEY MAPLE



CHESTNUT

CANYON BROWN



ENGINEERED LUXURY HYBRID



OCALA WALNUT




Ocala

WALNUT

This floor design features a rich, medium to dark brown wood grain with natural swirls and knot-like patterns that add depth and character. The warm walnut tone brings a sense of earthy elegance and vintage charm, making it ideal for spaces seeking a classic yet cozy atmosphere. Its smooth finish and symmetrical grain lines give it a refined, polished look while still maintaining a natural, grounded feel.

- Thickness (in mm) - 5, 6, & 7
- Plank Size - 7.13" X 48.03"
- Planks/Box - 10, 8 & 7
- Sq.Ft./Box - 23.77, 19.02 & 16.64
- Installation - Uniclic,
German Technology

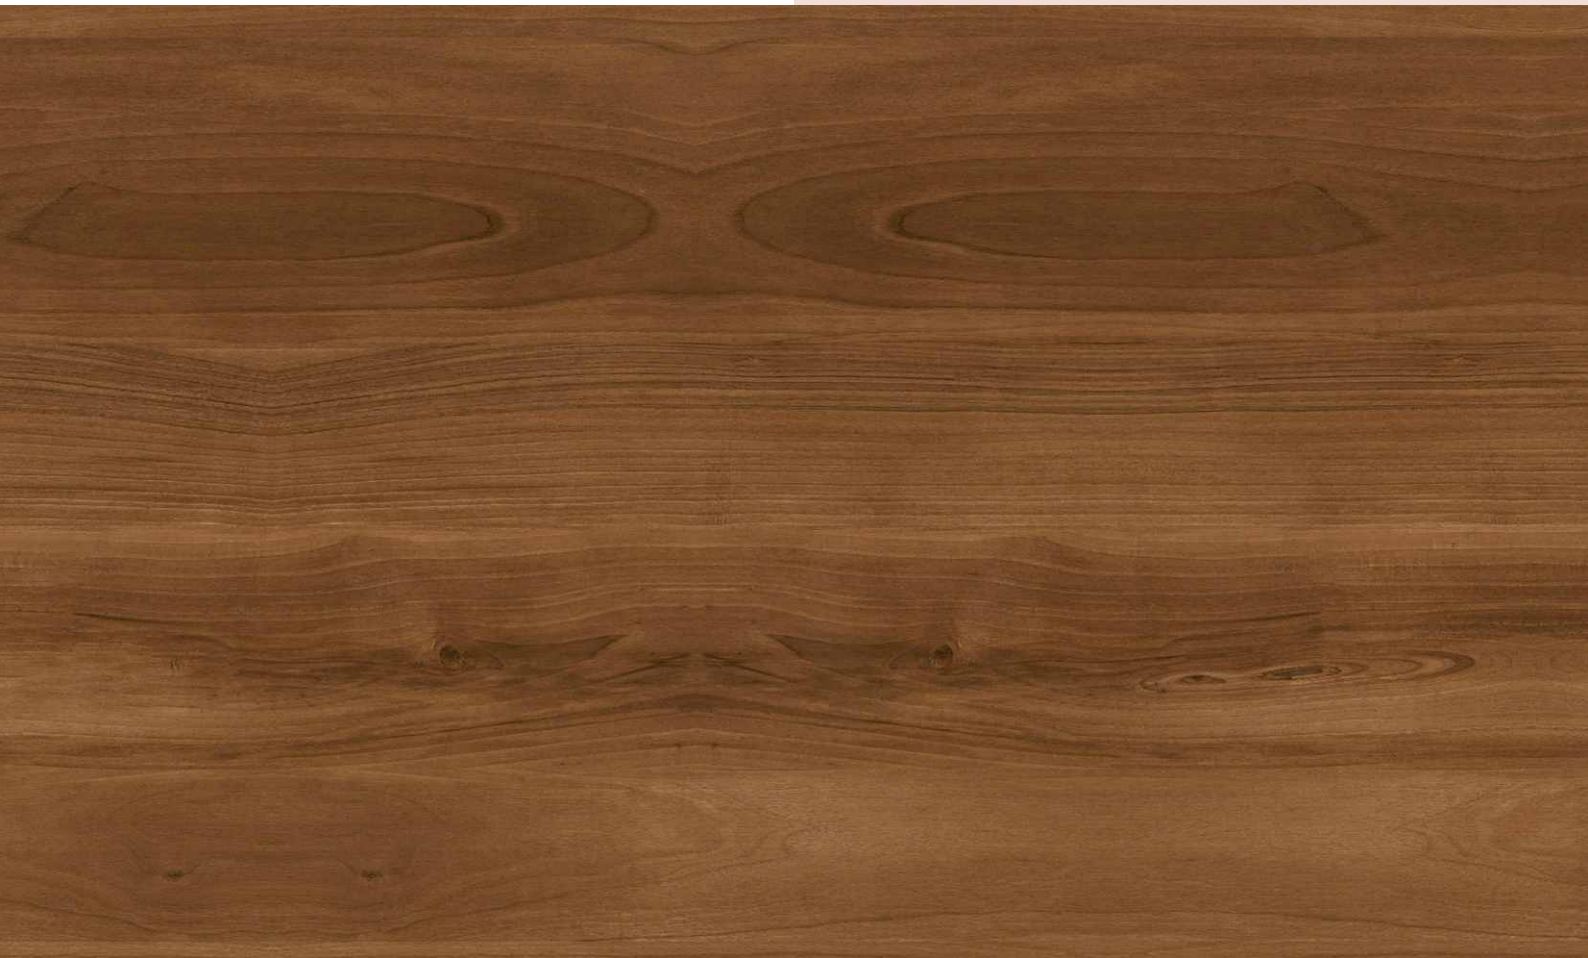



ELEGANCE OAK



ELEGANCE

OAK

This floor design showcases a warm honey-brown tone with a fine, even wood grain pattern that gives it a clean and timeless look. The subtle texture and linear grain provide a sense of natural sophistication while maintaining a light, welcoming vibe. It's versatile, understated, and adds a touch of nature-inspired warmth to any room.

- | | |
|-------------------|---------------------------------|
| Thickness (in mm) | - 5, 6, & 7 |
| Plank Size | - 7.13" X 48.03" |
| Planks/Box | - 10, 8 & 7 |
| Sq.Ft./Box | - 23.77, 19.02 & 16.64 |
| Installation | - Uniclic,
German Technology |





BOSTON OAK



BOSTON

OAK

Cool-toned taupe-brown hue with a subtle, linear wood grain pattern. The texture is refined, with soft, flowing grain lines that create a gentle movement across the surface. Its muted coloration offers a modern, understated elegance, making it ideal for minimalist or contemporary interiors. It brings a balanced aesthetic—neither too dark nor too light—offering both warmth and modernity.

- Thickness (in mm) - 5, 6, & 7
- Plank Size - 7.13" X 48.03"
- Planks/Box - 10, 8 & 7
- Sq.Ft./Box - 23.77, 19.02 & 16.64
- Installation - Uniclic,
German Technology





ROYAL BOURBON

ROYAL

BOURBON

A rich, warm brown tone inspired by aged hardwood, Royal Bourbon brings depth and sophistication to any space. Its subtle grain patterns and natural texture create an elegant yet timeless look, making it ideal for both classic and modern interiors. Perfect for residential and commercial settings, this shade adds a sense of warmth, luxury, and durability underfoot.

Thickness (in mm)	- 5, 6, & 7
Plank Size	- 7.13" X 48.03"
Planks/Box	- 10, 8 & 7
Sq.Ft./Box	- 23.77, 19.02 & 16.64
Installation	- Uniclic, German Technology





TRUFFLE OAK



TRUFFLE

OAK

A refined blend of warm earthy tones, Truffle Oak captures the essence of natural oak with a contemporary twist. Its smooth grain detailing and balanced brown hues create a welcoming and versatile look, ideal for modern as well as classic interiors. Designed to offer both elegance and durability, this shade enhances spaces with a subtle richness and timeless appeal.

- | | |
|-------------------|---------------------------------|
| Thickness (in mm) | - 5, 6, & 7 |
| Plank Size | - 7.13" X 48.03" |
| Planks/Box | - 10, 8 & 7 |
| Sq.Ft./Box | - 23.77, 19.02 & 16.64 |
| Installation | - Uniclic,
German Technology |





AMBERWOOD CLASSIC



AMBERWOOD

CLASSIC

A light, natural wood tone with soft amber undertones, Amberwood Classic brings brightness and warmth to any space. Its gentle grain patterns and subtle texture create a clean, airy look, perfect for contemporary and Scandinavian-style interiors. Designed for versatility and durability, this shade enhances interiors with a fresh, elegant, and timeless appeal.

Thickness (in mm)	- 5, 6, & 7
Plank Size	- 7.13" X 48.03"
Planks/Box	- 10, 8 & 7
Sq.Ft./Box	- 23.77, 19.02 & 16.64
Installation	- Uniclic, German Technology





MIDNIGHT ASH



MIDNIGHT ASH

A sophisticated grey tone with cool undertones, Midnight Ash delivers a sleek and modern aesthetic. Its refined wood grain texture adds depth while maintaining a clean, minimal look—perfect for contemporary and urban interiors. Combining style with durability, this shade creates a calm, elegant ambiance that complements a wide range of décor styles.

- Thickness (in mm) - 5, 6, & 7
- Plank Size - 7.13" X 48.03"
- Planks/Box - 10, 8 & 7
- Sq.Ft./Box - 23.77, 19.02 & 16.64
- Installation - Uniclic,
German Technology





HONEY MAPLE



HONEY

MAPLE

A warm and inviting blend of golden beige tones, Honey Maple reflects the natural beauty of maple wood with a soft, contemporary touch. Its subtle grain patterns and smooth texture create a cozy yet elegant ambiance, making it ideal for both modern and traditional interiors. Designed for durability and style, this shade adds brightness, warmth, and timeless charm to any space.

- Thickness (in mm) - 5, 6, & 7
- Plank Size - 7.13" X 48.03"
- Planks/Box - 10, 8 & 7
- Sq.Ft./Box - 23.77, 19.02 & 16.64
- Installation - Uniclic,
German Technology





CHESTNUT



CHESTNUT

Inspired by the richness of natural wood, Chestnut flooring showcases warm tones and authentic grain textures that add depth and character to any interior. Its timeless appeal blends effortlessly with both contemporary and classic spaces.

Thickness (in mm)	- 5, 6, & 7
Plank Size	- 7.13" X 48.03"
Planks/Box	- 10, 8 & 7
Sq.Ft./Box	- 23.77, 19.02 & 16.64
Installation	- Uniclic, German Technology





CANYON BROWN



CANYON

BROWN

Rich and sophisticated, Canyon brown flooring features deep, warm brown tones with subtle grain detailing that brings a sense of luxury and depth to any space. Its elegant finish enhances both modern and classic interiors, making it a versatile choice for refined living.

- | | |
|-------------------|---------------------------------|
| Thickness (in mm) | - 5, 6, & 7 |
| Plank Size | - 7.13" X 48.03" |
| Planks/Box | - 10, 8 & 7 |
| Sq.Ft./Box | - 23.77, 19.02 & 16.64 |
| Installation | - Uniclic,
German Technology |



TECHNICAL PARAMETERS

CHARACTERISTIC	STANDARDS			
	EN	Result	ASTM	Result
Size	EN 427	Pass	ASTM F536	Pass
Overall Thickness	EN 428	Pass	ASTM F36	Pass
Wear Layer Thickness	EN 429	Pass	ASTM F410	Pass
Dimension Squareness and Straightness	EN 427	Pass (Squareness : 0.18 mm Straightness : 0.07 mm)		
Chemical Resistance	EN 423	Pass	ASTM F925, ASTM F1344	Pass
Color Fastness To	EN 20105:B02	Pass, >-Grade 6	ASTM F1515	Pass
Artificial Light	Method A			
Heat Stability by Color Change			ASTM F1514	Pass
Castor Chair Suitability	EN 425	Pass		
Residual Indentation	EN 433	Pass, 0.06 mm	ASTM F1914, ASTM F970	Pass
Abrasion Group	EN 660-1/2	Group T	ASTM F510, ASTM D3384	Pass
Impact Resistance				Pass
Dimensional Stability	EN 434	Pass	ASTM F2199	Pass, 0.1%
Sound Reduction	EN ISO 717-2(0Lw)	2 dB		
Flexibility	EN 435 Method A	Pass	ASTM F137	Pass
Slip Resistance	EN 13893	Pass	ASTM D2047-93	Pass
Electrical Resistance	EN 1081 Method C	Class DS	ASTM F150-06	Pass
Thermal Resistance	EN 12644	Pass		
Toxic Element Test	EN 71-3	Pass. Not Toxic. Does not contain heavy metal and formaldehyde.		
Behaviour To Fire	EN ISO 11925-2 EN ISO 13501-1 EN ISO 9239-1	Bfl-SI	ASTM E648-06	Pass/Class I
Smoke Density			ASTM E662	Pass, <450



CARE & MAINTENANCE



GENERAL MAINTENANCE

- The predominant cause of damage to a floor's finish is abrasion from dirt and grit. It is important to use walk of mats at entrances and doorways and non-staining floor protectors under heavy furniture, chairs, and tables.
- Use rugs that are made specifically for vinyl floors and shake them out regularly. Place rugs in any area where water is in use, such as sinks or a pet's water dish.
- To prevent the floor from overheating or trapping moisture, never cover the flooring before, during, or after installation with any type of non-breathable or excessively thick rugs, mats, solid surface items, plastics, or a mattress that are laid directly onto the floor. It must be allowed to breathe.
- Oil or petroleum-based products can stain flooring surfaces. Do not track asphalt-driveway sealer, motor oil, wood stains or similar products onto the vinyl floor covering.
- Any flooring may become slippery when wet. Immediately wipe up wet areas from spills and be careful walking on any newly cleaned floor while it is wet.



PET GUIDE

Protecting the beauty of your floor can be easy, even with pets. Follow these simple guidelines to keep your flooring in good condition while having indoor pets.

- Clip your pet's nails regularly. If you can hear the nails clicking on the floor, they need to be trimmed.
- Wipe up any pet waste/vomit as quickly as possible. These accidents, if not properly cleaned up and/or left for long periods of time, are harsh and can damage the finish.
- It is recommended to use natural fiber rugs or a riser to keep water bowls off the floor.
- If your pets are hyper and like to run and slide across the floor, it is recommended to place rugs in these areas to protect the floor.



CLEANING METHODS

- Vacuum (WITHOUT BEATER BRUSH), dry mop, or sweep your floor at least once a week or more if needed. Do not let sand, dirt, or grit build up. It will act like sandpaper, and abrade and dull the finish. The best method of removing dirt and grit is vacuuming with a soft brush attachment on your vacuum.
- After all dirt and grit particles have been removed (using a vacuum, dry mop, or broom) lightly spray a mist of the cleaner over a 4' x 6' area of your floor or directly on the cleaning cloth. Thoroughly clean the floor surface and dry if needed. Finish one area before moving onto the next. Repeat the process until the floor is clean. When the cleaning cloth becomes soiled, rinse with water, thoroughly wringing out the cloth. Once the cleaning cloth becomes excessively soiled, launder and reuse. Excessively soiled cleaning cloths will cause streaking and can abrade the floor.



INSTALLATION GUIDELINES

GENERAL INFORMATION

- SPC flooring, a term gaining popularity in the flooring industry, offers numerous reasons to appreciate it. Its durability, versatile collection, high water resistance, and easy installation make it truly remarkable.
- Perfectly measure the room space area to calculate the SPC tile requirement.
- Subfloor must be flat, smooth, permanently dry, clean, and free from all foreign material such as dust, wax, solvents, paint, grease, oils, and old adhesive residue. The surface must be hard and dense, and free from powder or flaking.
- SPC click flooring can be installed over most existing hard-surface floor coverings, provided that the existing floor surface is clean, flat, dry and structurally sound.
- Acclimatize material for a minimum time of 24 hours prior to installation in the room/location where the installation will take place.
- To minimize shade variation, mix and install planks from several cartons.
- SPC click locking technology, is water/moisture resistant and reliably secures the flooring panels on all four sides.
- Tools needed for the installation: Straight edge, Pencil, Chalk Line, measuring tape, Power Crosscut Saw, Jigsaw for cutting irregular shapes, Rubber Mallet, Blue or Green Painter's Tape, Assorted spacers, the rubber hammer and EPE form sheet of 1 mm.

INSTALLATION PROCESS

- Before you start with the installation, it is important to determine the layout of the flooring. Proper planning and layout will prevent having narrow plank widths at wall junctures or very short length pieces at the end of rows.
- As with all plank products, install the planks parallel to the longest exterior wall.
- Determine if the starter row will need to be cut. If the first row of planks does not need to be trimmed in width, it will be necessary to cut off the unsupported tongue so that a clean, solid edge shows towards the wall.
- Installation of the product must start from the left side of the room, working to the right when working in front of the planks or facing the starting wall.
- Install the second plank in the row by angling the end tongue into the end groove of the first plank. Be careful not to bend the corner of the plank. Maintain an expansion gap of approximately 5/16"(8mm) from the wall. Start the second row by cutting a plank to the desired length. Keep in mind that the plank must not be shorter than 6"(15cm) keep constant to achieve the best appearance.



INSTALLATION GUIDELINES

- Install the first plank in the second row by inserting the long side tongue into the groove of the plank in the first row. This is best done with a low angle of the plank. Maintain pressure into the side seam as you rotate the plank to the subfloor.
- Install the second plank in the second row by inserting the short end tongue into the previously installed plank groove. Align the plank so that the long side tongue tip is positioned just over the groove lip of the plank in the first row. Working from the end seam, at a low angle, insert the long tongue into the groove of the adjoining plank. Very little force is required to seat the tongue into the groove. You should feel the tongue lock into the groove.
- Work across the length of the room installing planks along the wall in the first row and then aligning the planks in the second row. It is critical to keep these two rows straight and square, as they are the "foundation" for the rest of the installation. Check squareness and straightness often.
- Cut the last plank in the first row and leave an expansion gap of around 5/16" (8mm). Planks may be cut with a Utility Knife using the "score and snap" technique. The leftover of this plank may be used to start the third row if it's a minimum 6" (15cm) long.
- Continue installing planks and make sure to achieve a random appearance with end pieces of minimum 6" (15cm). Check that all planks are fully engaged; if a slight gapping is found, the gap can be tapped together by using a tapping block and a scrap of flooring to cover the tapping block in order to avoid damages on the planks.
- The maximum area that can be installed without an expansion joint is 10m x 20m. A section length of approximately longer than 12.5m should be installed expansion joint. If the temperature while using is higher than the temperature when installing, should apply a little smaller area and shorter length than usual for the standard of expansion joint.
- When fitting under door casings, etc. the flexibility and convenient connection of SPC click becomes evident. If necessary, a flat pull bar may be used to assist in locking the planks.
- When fitting around obstacles or into irregular spaces, planks can be cut easily and cleanly using a Utility Knife with a sharp blade. It is often beneficial to make a cardboard template of the area and transfer this pattern to the plank.
- Protect all exposed edges of the flooring by installing wall moulding and/or transition strips. Make sure that no plank will be secured in any way to the sub floor.
- Protect the finished flooring from exposure to direct sunlight.



**SCAN/CLICK
TO DOWNLOAD
INSTALLATION
GUIDELINES**



Unique • Elegant • Timeless

Fab Floors International

Khasra No.-364, 372 & 373, Patan Bus Stop, Jaipur Road,
Patan, Ajmer-305816, Rajasthan (India)

SALES ENQUIRIES

Phone : +91-8882987473 / +91-9554953939

Email : sales@fabfloors.in

www.fabfloors.in



SCAN/CLICK

